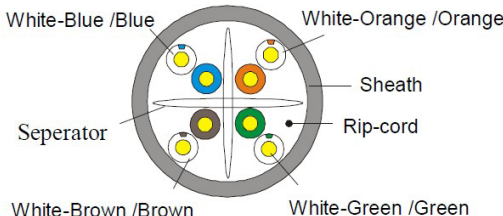


## Cat6 - UTP - SOLID - LSZH

Category	U/UTP CAT6-4P-LSZH																																																																		
Reference	ISO/IEC 11801 TIA-568-C.2																																																																		
CPR Classification	Eca																																																																		
Material	Solid - 100% copper																																																																		
Shielding class	UTP	<b>Technical performance (100m):</b>																																																																	
AWG	23	<table><tr><th>Frequency (Mhz)</th><th>RL ≥dB</th><th>ATT ≤dB</th><th>NEXT ≥dB</th><th>Phase DELAY ≤ns</th></tr><tr><td>1</td><td>20.0</td><td>2.03</td><td>74.3</td><td>570.00</td></tr><tr><td>4.0</td><td>23.0</td><td>3.78</td><td>65.3</td><td>552.00</td></tr><tr><td>8.0</td><td>24.5</td><td>5.32</td><td>60.8</td><td>546.73</td></tr><tr><td>10.0</td><td>25.0</td><td>5.95</td><td>59.3</td><td>545.38</td></tr><tr><td>16.0</td><td>25.0</td><td>7.55</td><td>56.2</td><td>543.00</td></tr><tr><td>20.0</td><td>25.0</td><td>8.47</td><td>54.8</td><td>542.05</td></tr><tr><td>25.0</td><td>24.3</td><td>9.51</td><td>53.3</td><td>541.20</td></tr><tr><td>31.25</td><td>23.6</td><td>10.67</td><td>51.9</td><td>540.44</td></tr><tr><td>62.5</td><td>21.5</td><td>15.38</td><td>47.7</td><td>538.55</td></tr><tr><td>100</td><td>20.1</td><td>19.80</td><td>44.3</td><td>537.60</td></tr><tr><td>200</td><td>18.0</td><td>28.98</td><td>39.8</td><td>536.54</td></tr><tr><td>250</td><td>17.3</td><td>32.85</td><td>38.3</td><td>536.27</td></tr></table>	Frequency (Mhz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	Phase DELAY ≤ns	1	20.0	2.03	74.3	570.00	4.0	23.0	3.78	65.3	552.00	8.0	24.5	5.32	60.8	546.73	10.0	25.0	5.95	59.3	545.38	16.0	25.0	7.55	56.2	543.00	20.0	25.0	8.47	54.8	542.05	25.0	24.3	9.51	53.3	541.20	31.25	23.6	10.67	51.9	540.44	62.5	21.5	15.38	47.7	538.55	100	20.1	19.80	44.3	537.60	200	18.0	28.98	39.8	536.54	250	17.3	32.85	38.3	536.27
Frequency (Mhz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	Phase DELAY ≤ns																																																															
1	20.0	2.03	74.3	570.00																																																															
4.0	23.0	3.78	65.3	552.00																																																															
8.0	24.5	5.32	60.8	546.73																																																															
10.0	25.0	5.95	59.3	545.38																																																															
16.0	25.0	7.55	56.2	543.00																																																															
20.0	25.0	8.47	54.8	542.05																																																															
25.0	24.3	9.51	53.3	541.20																																																															
31.25	23.6	10.67	51.9	540.44																																																															
62.5	21.5	15.38	47.7	538.55																																																															
100	20.1	19.80	44.3	537.60																																																															
200	18.0	28.98	39.8	536.54																																																															
250	17.3	32.85	38.3	536.27																																																															
Diameter cable	6,1 mm																																																																		
Length	50m																																																																		
Transfer frequency	250.0 MHz																																																																		
Bending radius	8x Diameter cable																																																																		
Tensile Strength (Mpa)	≥ 13.5																																																																		
Type of cable sheathing	LSZH	<table><tr><th>Frequency (Mhz)</th><th>PSNEXT ≥dB</th><th>ELFEXT ≤dB</th><th>PSELFEXT ≥dB</th></tr><tr><td>1</td><td>72.3</td><td>67.8</td><td>64.8</td></tr><tr><td>4.0</td><td>63.3</td><td>55.8</td><td>52.8</td></tr><tr><td>8.0</td><td>58.8</td><td>49.7</td><td>46.7</td></tr><tr><td>10.0</td><td>57.3</td><td>47.8</td><td>44.8</td></tr><tr><td>16.0</td><td>54.2</td><td>43.7</td><td>40.7</td></tr><tr><td>20.0</td><td>52.8</td><td>41.8</td><td>38.8</td></tr><tr><td>25.0</td><td>51.3</td><td>39.8</td><td>36.8</td></tr><tr><td>31.25</td><td>49.9</td><td>37.9</td><td>34.9</td></tr><tr><td>62.5</td><td>45.4</td><td>31.9</td><td>28.9</td></tr><tr><td>100</td><td>42.3</td><td>27.8</td><td>24.8</td></tr><tr><td>200</td><td>37.8</td><td>21.8</td><td>18.8</td></tr><tr><td>250</td><td>36.3</td><td>19.8</td><td>16.8</td></tr></table>	Frequency (Mhz)	PSNEXT ≥dB	ELFEXT ≤dB	PSELFEXT ≥dB	1	72.3	67.8	64.8	4.0	63.3	55.8	52.8	8.0	58.8	49.7	46.7	10.0	57.3	47.8	44.8	16.0	54.2	43.7	40.7	20.0	52.8	41.8	38.8	25.0	51.3	39.8	36.8	31.25	49.9	37.9	34.9	62.5	45.4	31.9	28.9	100	42.3	27.8	24.8	200	37.8	21.8	18.8	250	36.3	19.8	16.8													
Frequency (Mhz)	PSNEXT ≥dB	ELFEXT ≤dB	PSELFEXT ≥dB																																																																
1	72.3	67.8	64.8																																																																
4.0	63.3	55.8	52.8																																																																
8.0	58.8	49.7	46.7																																																																
10.0	57.3	47.8	44.8																																																																
16.0	54.2	43.7	40.7																																																																
20.0	52.8	41.8	38.8																																																																
25.0	51.3	39.8	36.8																																																																
31.25	49.9	37.9	34.9																																																																
62.5	45.4	31.9	28.9																																																																
100	42.3	27.8	24.8																																																																
200	37.8	21.8	18.8																																																																
250	36.3	19.8	16.8																																																																
Color	Blue																																																																		
Core color	1 - White-Blue/ Blue																																																																		
	2 - White-Orange/ Orange																																																																		
	3 - White-Green/ Green																																																																		
	4 - White-Brown/ Brown																																																																		
Rip-cord	Yes																																																																		
Packing	Pull box																																																																		