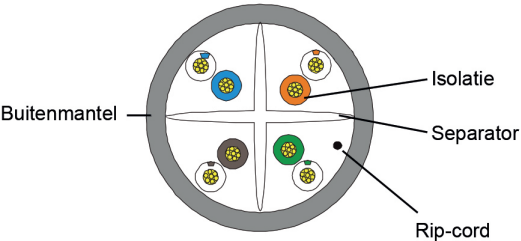


Cat6 - UTP - SOEPEL - PVC

Categorie	U/UTP CAT6-4P-PVC																																																																																																																						
Referentie	ISO/IEC 11801 TIA-568-C.2																																																																																																																						
CPR Classificatie	Fca																																																																																																																						
Kern	Soepel - 100% koper	Technische prestaties (<30m): <table><thead><tr><th>Frequentie (Mhz)</th><th>RL ≥dB</th><th>ATT ≤dB</th><th>NEXT ≥dB</th><th>Phase DELAY ≤ns</th></tr></thead><tbody><tr><td>1</td><td>19.1</td><td>3.0</td><td>65.0</td><td>521</td></tr><tr><td>4.0</td><td>21.0</td><td>3.5</td><td>64.1</td><td>504</td></tr><tr><td>8.0</td><td>21.0</td><td>5.0</td><td>59.4</td><td>500</td></tr><tr><td>10.0</td><td>21.0</td><td>5.5</td><td>57.8</td><td>498</td></tr><tr><td>16.0</td><td>20.0</td><td>7.0</td><td>54.6</td><td>496</td></tr><tr><td>20.0</td><td>19.5</td><td>7.9</td><td>53.1</td><td>495</td></tr><tr><td>25.0</td><td>19.0</td><td>8.9</td><td>51.5</td><td>495</td></tr><tr><td>31.25</td><td>18.5</td><td>10.0</td><td>50.0</td><td>494</td></tr><tr><td>62.5</td><td>16.0</td><td>14.4</td><td>45.1</td><td>492</td></tr><tr><td>100</td><td>14.0</td><td>18.6</td><td>41.8</td><td>491</td></tr><tr><td>200</td><td>11.0</td><td>27.4</td><td>36.9</td><td>490</td></tr><tr><td>250</td><td>10.0</td><td>31.1</td><td>35.3</td><td>490</td></tr></tbody></table> <table><thead><tr><th>Frequentie (Mhz)</th><th>PSNEXT ≥dB</th><th>ELFEXT ≤dB</th><th>PSELFEXT ≥dB</th></tr></thead><tbody><tr><td>1</td><td>62.0</td><td>64.2</td><td>61.2</td></tr><tr><td>4.0</td><td>61.8</td><td>52.1</td><td>49.1</td></tr><tr><td>8.0</td><td>57.0</td><td>46.1</td><td>43.1</td></tr><tr><td>10.0</td><td>55.5</td><td>44.2</td><td>41.2</td></tr><tr><td>16.0</td><td>52.2</td><td>40.1</td><td>37.1</td></tr><tr><td>20.0</td><td>50.7</td><td>38.2</td><td>35.2</td></tr><tr><td>25.0</td><td>49.1</td><td>36.2</td><td>33.2</td></tr><tr><td>31.25</td><td>47.5</td><td>34.3</td><td>31.3</td></tr><tr><td>62.5</td><td>42.7</td><td>28.3</td><td>25.3</td></tr><tr><td>100</td><td>39.3</td><td>24.2</td><td>21.2</td></tr><tr><td>200</td><td>34.3</td><td>18.2</td><td>15.2</td></tr><tr><td>250</td><td>32.7</td><td>16.2</td><td>13.2</td></tr></tbody></table>	Frequentie (Mhz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	Phase DELAY ≤ns	1	19.1	3.0	65.0	521	4.0	21.0	3.5	64.1	504	8.0	21.0	5.0	59.4	500	10.0	21.0	5.5	57.8	498	16.0	20.0	7.0	54.6	496	20.0	19.5	7.9	53.1	495	25.0	19.0	8.9	51.5	495	31.25	18.5	10.0	50.0	494	62.5	16.0	14.4	45.1	492	100	14.0	18.6	41.8	491	200	11.0	27.4	36.9	490	250	10.0	31.1	35.3	490	Frequentie (Mhz)	PSNEXT ≥dB	ELFEXT ≤dB	PSELFEXT ≥dB	1	62.0	64.2	61.2	4.0	61.8	52.1	49.1	8.0	57.0	46.1	43.1	10.0	55.5	44.2	41.2	16.0	52.2	40.1	37.1	20.0	50.7	38.2	35.2	25.0	49.1	36.2	33.2	31.25	47.5	34.3	31.3	62.5	42.7	28.3	25.3	100	39.3	24.2	21.2	200	34.3	18.2	15.2	250	32.7	16.2	13.2
Frequentie (Mhz)	RL ≥dB		ATT ≤dB	NEXT ≥dB	Phase DELAY ≤ns																																																																																																																		
1	19.1		3.0	65.0	521																																																																																																																		
4.0	21.0		3.5	64.1	504																																																																																																																		
8.0	21.0		5.0	59.4	500																																																																																																																		
10.0	21.0		5.5	57.8	498																																																																																																																		
16.0	20.0		7.0	54.6	496																																																																																																																		
20.0	19.5		7.9	53.1	495																																																																																																																		
25.0	19.0		8.9	51.5	495																																																																																																																		
31.25	18.5		10.0	50.0	494																																																																																																																		
62.5	16.0		14.4	45.1	492																																																																																																																		
100	14.0		18.6	41.8	491																																																																																																																		
200	11.0		27.4	36.9	490																																																																																																																		
250	10.0		31.1	35.3	490																																																																																																																		
Frequentie (Mhz)	PSNEXT ≥dB		ELFEXT ≤dB	PSELFEXT ≥dB																																																																																																																			
1	62.0	64.2	61.2																																																																																																																				
4.0	61.8	52.1	49.1																																																																																																																				
8.0	57.0	46.1	43.1																																																																																																																				
10.0	55.5	44.2	41.2																																																																																																																				
16.0	52.2	40.1	37.1																																																																																																																				
20.0	50.7	38.2	35.2																																																																																																																				
25.0	49.1	36.2	33.2																																																																																																																				
31.25	47.5	34.3	31.3																																																																																																																				
62.5	42.7	28.3	25.3																																																																																																																				
100	39.3	24.2	21.2																																																																																																																				
200	34.3	18.2	15.2																																																																																																																				
250	32.7	16.2	13.2																																																																																																																				
Afscherming	UTP																																																																																																																						
AWG	26																																																																																																																						
Diameter kabel	5,4 mm																																																																																																																						
Lengte	100m																																																																																																																						
Bandbreedte	250.0 MHz																																																																																																																						
Buigradius	8x Diameter kabel																																																																																																																						
Maximale trekkracht (Mpa)	≥ 12.5																																																																																																																						
Materiaal buitenmantel	PVC																																																																																																																						
Kleur buitenmantel	Grijs																																																																																																																						
Aderkleuren	1 - Wit-Blauw/ Blauw																																																																																																																						
	2 - Wit-Oranje/ Oranje																																																																																																																						
	3 - Wit-Groen/ Groen																																																																																																																						
	4 - Wit-Bruin/ Bruin																																																																																																																						
Rip-cord	Aanwezig																																																																																																																						
Verpakking	Trekdoos																																																																																																																						