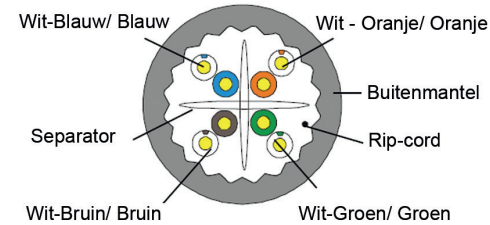


## Cat6A - UTP - STUG - LSZH

Categorie	U/UTP CAT6A-4P-LSZH																																																																												
Referentie	ISO/IEC 11801 TIA-568-C.2																																																																												
CPR Classificatie	Eca																																																																												
Kern	Stug - 100% koper																																																																												
Afscherming	UTP	<b>Technische prestaties (100m):</b>																																																																											
AWG	23	<table><tr><th>Frequentie (Mhz)</th><th>RL ≥dB</th><th>ATT ≤dB</th><th>NEXT ≥dB</th><th>DELAY ≤ns</th></tr><tr><td>1</td><td>20.0</td><td>2.1</td><td>74.3</td><td>570.0</td></tr><tr><td>4.0</td><td>23.0</td><td>3.8</td><td>65.3</td><td>552.0</td></tr><tr><td>8.0</td><td>24.5</td><td>5.3</td><td>60.8</td><td>546.7</td></tr><tr><td>10.0</td><td>25.0</td><td>5.9</td><td>59.3</td><td>545.4</td></tr><tr><td>16.0</td><td>25.0</td><td>7.5</td><td>56.2</td><td>543.0</td></tr><tr><td>20.0</td><td>25.0</td><td>8.4</td><td>54.8</td><td>542.1</td></tr><tr><td>25.0</td><td>24.3</td><td>9.4</td><td>53.3</td><td>541.2</td></tr><tr><td>31.25</td><td>23.6</td><td>10.5</td><td>51.9</td><td>540.4</td></tr><tr><td>62.5</td><td>21.5</td><td>15.0</td><td>47.4</td><td>538.6</td></tr><tr><td>100</td><td>20.1</td><td>19.1</td><td>44.3</td><td>537.6</td></tr><tr><td>200</td><td>18.0</td><td>27.6</td><td>39.8</td><td>536.5</td></tr><tr><td>250</td><td>17.3</td><td>31.1</td><td>38.3</td><td>536.3</td></tr><tr><td>300</td><td>16.8</td><td>34.3</td><td>37.1</td><td>536.1</td></tr><tr><td>500</td><td>15.2</td><td>45.3</td><td>33.8</td><td>535.6</td></tr></table>	Frequentie (Mhz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	DELAY ≤ns	1	20.0	2.1	74.3	570.0	4.0	23.0	3.8	65.3	552.0	8.0	24.5	5.3	60.8	546.7	10.0	25.0	5.9	59.3	545.4	16.0	25.0	7.5	56.2	543.0	20.0	25.0	8.4	54.8	542.1	25.0	24.3	9.4	53.3	541.2	31.25	23.6	10.5	51.9	540.4	62.5	21.5	15.0	47.4	538.6	100	20.1	19.1	44.3	537.6	200	18.0	27.6	39.8	536.5	250	17.3	31.1	38.3	536.3	300	16.8	34.3	37.1	536.1	500	15.2	45.3	33.8	535.6
Frequentie (Mhz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	DELAY ≤ns																																																																									
1	20.0	2.1	74.3	570.0																																																																									
4.0	23.0	3.8	65.3	552.0																																																																									
8.0	24.5	5.3	60.8	546.7																																																																									
10.0	25.0	5.9	59.3	545.4																																																																									
16.0	25.0	7.5	56.2	543.0																																																																									
20.0	25.0	8.4	54.8	542.1																																																																									
25.0	24.3	9.4	53.3	541.2																																																																									
31.25	23.6	10.5	51.9	540.4																																																																									
62.5	21.5	15.0	47.4	538.6																																																																									
100	20.1	19.1	44.3	537.6																																																																									
200	18.0	27.6	39.8	536.5																																																																									
250	17.3	31.1	38.3	536.3																																																																									
300	16.8	34.3	37.1	536.1																																																																									
500	15.2	45.3	33.8	535.6																																																																									
Diameter kabel	7,1 mm																																																																												
Lengte	50m																																																																												
Bandbreedte	500.0 MHz																																																																												
Buigradius	8x Diameter kabel																																																																												
Maximale trekkracht (Mpa)	≥ 10.0																																																																												
Materiaal buitenmantel	LSZH	<table><tr><th>Frequentie (Mhz)</th><th>PSNEXT ≥dB</th><th>ELFEXT ≤dB</th><th>PSELFEXT ≥dB</th></tr><tr><td>1</td><td>72.3</td><td>67.8</td><td>64.8</td></tr><tr><td>4.0</td><td>63.3</td><td>55.8</td><td>52.8</td></tr><tr><td>8.0</td><td>58.8</td><td>49.7</td><td>46.7</td></tr><tr><td>10.0</td><td>57.3</td><td>47.8</td><td>44.8</td></tr><tr><td>16.0</td><td>54.2</td><td>43.7</td><td>40.7</td></tr><tr><td>20.0</td><td>52.8</td><td>41.8</td><td>38.8</td></tr><tr><td>25.0</td><td>51.3</td><td>39.8</td><td>36.8</td></tr><tr><td>31.25</td><td>49.9</td><td>37.9</td><td>34.9</td></tr><tr><td>62.5</td><td>45.4</td><td>31.9</td><td>28.9</td></tr><tr><td>100</td><td>42.3</td><td>27.8</td><td>24.8</td></tr><tr><td>200</td><td>37.8</td><td>21.8</td><td>18.8</td></tr><tr><td>250</td><td>36.3</td><td>19.8</td><td>16.8</td></tr><tr><td>300</td><td>35.1</td><td>18.3</td><td>15.3</td></tr><tr><td>500</td><td>31.8</td><td>13.8</td><td>10.8</td></tr></table>	Frequentie (Mhz)	PSNEXT ≥dB	ELFEXT ≤dB	PSELFEXT ≥dB	1	72.3	67.8	64.8	4.0	63.3	55.8	52.8	8.0	58.8	49.7	46.7	10.0	57.3	47.8	44.8	16.0	54.2	43.7	40.7	20.0	52.8	41.8	38.8	25.0	51.3	39.8	36.8	31.25	49.9	37.9	34.9	62.5	45.4	31.9	28.9	100	42.3	27.8	24.8	200	37.8	21.8	18.8	250	36.3	19.8	16.8	300	35.1	18.3	15.3	500	31.8	13.8	10.8															
Frequentie (Mhz)	PSNEXT ≥dB	ELFEXT ≤dB	PSELFEXT ≥dB																																																																										
1	72.3	67.8	64.8																																																																										
4.0	63.3	55.8	52.8																																																																										
8.0	58.8	49.7	46.7																																																																										
10.0	57.3	47.8	44.8																																																																										
16.0	54.2	43.7	40.7																																																																										
20.0	52.8	41.8	38.8																																																																										
25.0	51.3	39.8	36.8																																																																										
31.25	49.9	37.9	34.9																																																																										
62.5	45.4	31.9	28.9																																																																										
100	42.3	27.8	24.8																																																																										
200	37.8	21.8	18.8																																																																										
250	36.3	19.8	16.8																																																																										
300	35.1	18.3	15.3																																																																										
500	31.8	13.8	10.8																																																																										
Kleur buitenmantel	Blauw																																																																												
Aderkleuren	1 - Wit-Blauw/ Blauw																																																																												
	2 - Wit-Oranje/ Oranje																																																																												
	3 - Wit-Groen/ Groen																																																																												
	4 - Wit-Bruin/ Bruin																																																																												
Rip-cord	Aanwezig																																																																												
Verpakking	Trekdoos																																																																												