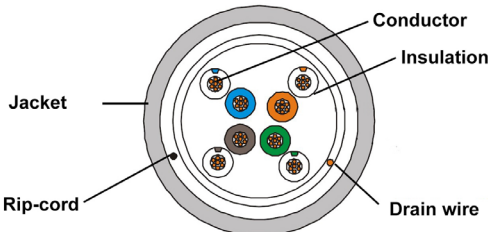


Cat5e - FTP - STRANDED - PVC

Category	PATCH F/UTP CAT5E-4P-PVC																																																																																																				
Reference	ISO/IEC 11801 TIA-568-C.2																																																																																																				
CPR Classification	Fca																																																																																																				
Material	Stranded - 100% copper																																																																																																				
Shielding class	FTP	<div>Technical performance (<30m):</div> <table><thead><tr><th>Frequency (Mhz)</th><th>RL ≥dB</th><th>ATT ≤dB</th><th>NEXT ≥dB</th><th>Phase DELAY ≤ns</th></tr></thead><tbody><tr><td>1</td><td>19.0</td><td>3.0</td><td>60.0</td><td>521</td></tr><tr><td>4.0</td><td>19.0</td><td>3.9</td><td>54.8</td><td>504</td></tr><tr><td>8.0</td><td>19.0</td><td>5.5</td><td>50.0</td><td>500</td></tr><tr><td>10.0</td><td>19.0</td><td>6.2</td><td>48.5</td><td>498</td></tr><tr><td>16.0</td><td>19.0</td><td>7.9</td><td>45.2</td><td>496</td></tr><tr><td>20.0</td><td>19.0</td><td>8.9</td><td>43.7</td><td>495</td></tr><tr><td>25.0</td><td>18.0</td><td>10.0</td><td>42.1</td><td>495</td></tr><tr><td>31.25</td><td>17.1</td><td>11.2</td><td>40.5</td><td>494</td></tr><tr><td>62.5</td><td>14.1</td><td>16.2</td><td>35.7</td><td>492</td></tr><tr><td>100</td><td>12.0</td><td>21.0</td><td>32.3</td><td>491</td></tr></tbody></table> <table><thead><tr><th>Frequency (Mhz)</th><th>PSNEXT ≥dB</th><th>ELFEXT ≤dB</th><th>PSELFEXT ≥dB</th></tr></thead><tbody><tr><td>1</td><td>57.0</td><td>58.6</td><td>55.6</td></tr><tr><td>4.0</td><td>51.8</td><td>46.6</td><td>43.6</td></tr><tr><td>8.0</td><td>47.0</td><td>40.6</td><td>37.5</td></tr><tr><td>10.0</td><td>45.5</td><td>38.6</td><td>35.6</td></tr><tr><td>16.0</td><td>42.2</td><td>34.5</td><td>31.5</td></tr><tr><td>20.0</td><td>40.7</td><td>32.6</td><td>29.6</td></tr><tr><td>25.0</td><td>39.1</td><td>30.7</td><td>27.7</td></tr><tr><td>31.25</td><td>37.5</td><td>28.7</td><td>25.7</td></tr><tr><td>62.5</td><td>32.7</td><td>22.7</td><td>19.7</td></tr><tr><td>100</td><td>29.3</td><td>18.6</td><td>15.6</td></tr></tbody></table>	Frequency (Mhz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	Phase DELAY ≤ns	1	19.0	3.0	60.0	521	4.0	19.0	3.9	54.8	504	8.0	19.0	5.5	50.0	500	10.0	19.0	6.2	48.5	498	16.0	19.0	7.9	45.2	496	20.0	19.0	8.9	43.7	495	25.0	18.0	10.0	42.1	495	31.25	17.1	11.2	40.5	494	62.5	14.1	16.2	35.7	492	100	12.0	21.0	32.3	491	Frequency (Mhz)	PSNEXT ≥dB	ELFEXT ≤dB	PSELFEXT ≥dB	1	57.0	58.6	55.6	4.0	51.8	46.6	43.6	8.0	47.0	40.6	37.5	10.0	45.5	38.6	35.6	16.0	42.2	34.5	31.5	20.0	40.7	32.6	29.6	25.0	39.1	30.7	27.7	31.25	37.5	28.7	25.7	62.5	32.7	22.7	19.7	100	29.3	18.6	15.6
Frequency (Mhz)	RL ≥dB		ATT ≤dB	NEXT ≥dB	Phase DELAY ≤ns																																																																																																
1	19.0		3.0	60.0	521																																																																																																
4.0	19.0		3.9	54.8	504																																																																																																
8.0	19.0		5.5	50.0	500																																																																																																
10.0	19.0		6.2	48.5	498																																																																																																
16.0	19.0		7.9	45.2	496																																																																																																
20.0	19.0		8.9	43.7	495																																																																																																
25.0	18.0		10.0	42.1	495																																																																																																
31.25	17.1		11.2	40.5	494																																																																																																
62.5	14.1		16.2	35.7	492																																																																																																
100	12.0		21.0	32.3	491																																																																																																
Frequency (Mhz)	PSNEXT ≥dB		ELFEXT ≤dB	PSELFEXT ≥dB																																																																																																	
1	57.0		58.6	55.6																																																																																																	
4.0	51.8		46.6	43.6																																																																																																	
8.0	47.0		40.6	37.5																																																																																																	
10.0	45.5		38.6	35.6																																																																																																	
16.0	42.2		34.5	31.5																																																																																																	
20.0	40.7		32.6	29.6																																																																																																	
25.0	39.1	30.7	27.7																																																																																																		
31.25	37.5	28.7	25.7																																																																																																		
62.5	32.7	22.7	19.7																																																																																																		
100	29.3	18.6	15.6																																																																																																		
AWG	26																																																																																																				
Diameter cable	6 mm																																																																																																				
Length	305m																																																																																																				
Transfer frequency	100.0 MHz																																																																																																				
Bending radius	8x Diameter cable																																																																																																				
Tensile Strength (Mpa)	≥ 10																																																																																																				
Type of cable sheathing	PVC																																																																																																				
Color	Grey																																																																																																				
Core color	1 - Blue/ White-Blue																																																																																																				
	2 - Orange/ White-Orange																																																																																																				
	3 - Green/ White-Green																																																																																																				
	4 - Brown/ White-Brown																																																																																																				
Rip-cord	Yes																																																																																																				
Packing	Pull box																																																																																																				