F/UTP 4Pairs cable-category 6-LSZH Sheath

Content of the Data Sheet					
Customer No.		Customer Reference			
Category	F/UTP CAT6-4P-LSZH(Dca,s2,d2,a1)				
Reference Standard	ISO/IEC11801 、ANSI/TIA-568.2-D				
Conductor	Material	SOLID-Bare Copper			
	Nom.O.D.(mm)	0.550	up	+0.005	
			down	-0.005	
Insulation	Material	HDPE			
	Diameter	1.10±0.08 mm			
Screening Material	Mylar+ AL/Mylar				
Sheath	Thickness	0.55±0.05mm			
	External O.D.	7.4±0.4mm			
	Surface	Clean,Frap,Satiation			
	Material	FR-LSZH(complies RoHS)			
	Color	TBD			
Surface Printing	Letter height	3.0±0.3mm			
	Color	Black			
	Print error & Space	⩽±0.5%，1m			
Core Color	1 White- Blue /Blue	2 White-Orange /Orange			
	3 White- Green /Green	4 White- Brown /Brown			
Packing	Wooden Tray & Carton				
Wooden Tray dimension	According to the requires				
Packing length	305±1.5m				
Rip-cord	Yes	Drain wire	Yes		
Sheath Physical Properties	Before Aging Tensile Strength (Mpa) ⩾10.0 Elongation(%) ⩾125				
	Aging Period (℃×hrs) 100℃×24h×7d				
	After Aging Tensile Strength(Mpa) ⩾8.0 Elongation(%) ⩾100				
	Cold bend(-20±2℃×4h) 8×Cable O.D.，No visible cracks				
Electrical Characteristics (20℃)	1.0-250.0MHz Impedance (Ω) 100±15				
	1.0-250.0MHz Delay Skew (ns/100m) ⩽45				
	Unbalanced-to-ground capacitance (pf/100m) max 330				
	DC Resistance (Ω/100m) max 9.38				
	DC Conductor Resistance Unbalance (%) max 5.0				

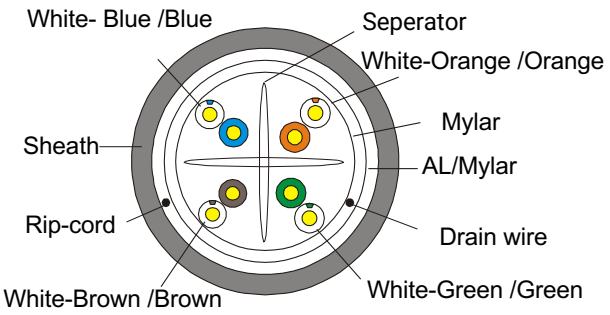

Technical Performance (100m):

Frequency (MHz)	RL ⩾dB	ATT(20℃) ⩽dB	NEXT ⩾dB	PHASE DELAY ⩽ns
1	20.0	—	74.3	570.00
4.0	23.0	3.78	65.3	552.00
8.0	24.5	5.32	60.8	546.73
10.0	25.0	5.95	59.3	545.38
16.0	25.0	7.55	56.2	543.00
20.0	25.0	8.47	54.8	542.05
25.0	24.3	9.51	53.3	541.20
31.25	23.6	10.67	51.9	540.44
62.5	21.5	15.38	47.7	538.55
100	20.1	19.80	44.3	537.60
200	18.0	28.98	39.8	536.54
250	17.3	32.85	38.3	536.27

Frequency (MHz)	PSNEXT ⩾dB	ELFEXT ⩾dB	PSELFEXT ⩾dB
1	72.3	67.8	64.8
4	63.3	55.8	52.8
8	58.8	49.7	46.7
10	57.3	47.8	44.8
16	54.2	43.7	40.7
20	52.8	41.8	38.8
25	51.3	39.8	36.8
31.25	49.9	37.9	34.9
62.5	45.4	31.9	28.9
100	42.3	27.8	24.8
200	37.8	21.8	18.8
250	36.3	19.8	16.8

Reaction to fire Classification：Dca,s2,d2,a1