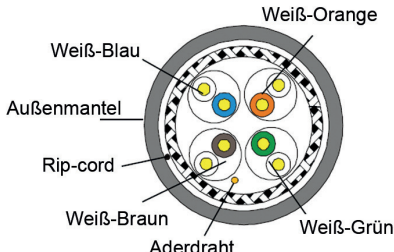


## Cat6A - SFTP - STARR - LSZH

Kategorie	S/FTP CAT6A-4P-LSZH-AM30																																																																																																																																								
Referenz	ISO/IEC 11801 TIA-568-C.2																																																																																																																																								
CPR Klasse	Eca																																																																																																																																								
Kern	Starr - 100% Kupfer	<div>Technische Leistung (100m):</div> <table><thead><tr><th>Frequenz (Mhz)</th><th>RL ≥dB</th><th>ATT ≤dB</th><th>NEXT ≥dB</th><th>DELAY ≤ns</th></tr></thead><tbody><tr><td>1</td><td>20.0</td><td>-</td><td>74.3</td><td>570.0</td></tr><tr><td>4.0</td><td>23.0</td><td>3.8</td><td>65.3</td><td>552.0</td></tr><tr><td>8.0</td><td>24.5</td><td>5.3</td><td>60.8</td><td>546.7</td></tr><tr><td>10.0</td><td>25.0</td><td>5.9</td><td>59.3</td><td>545.4</td></tr><tr><td>16.0</td><td>25.0</td><td>7.5</td><td>56.2</td><td>543.0</td></tr><tr><td>20.0</td><td>25.0</td><td>8.4</td><td>54.8</td><td>542.1</td></tr><tr><td>25.0</td><td>24.3</td><td>9.4</td><td>53.3</td><td>541.2</td></tr><tr><td>31.25</td><td>23.6</td><td>10.5</td><td>51.9</td><td>540.4</td></tr><tr><td>62.5</td><td>21.5</td><td>15.0</td><td>47.4</td><td>538.6</td></tr><tr><td>100</td><td>20.1</td><td>19.1</td><td>44.3</td><td>537.6</td></tr><tr><td>200</td><td>18.0</td><td>27.6</td><td>39.8</td><td>536.5</td></tr><tr><td>250</td><td>17.3</td><td>31.1</td><td>38.3</td><td>536.3</td></tr><tr><td>300</td><td>16.8</td><td>34.3</td><td>37.1</td><td>536.1</td></tr><tr><td>500</td><td>15.2</td><td>45.3</td><td>33.8</td><td>535.6</td></tr></tbody></table> <table><thead><tr><th>Frequenz (Mhz)</th><th>PSNEXT ≥dB</th><th>ELFEXT ≤dB</th><th>PSELFEXT ≥dB</th></tr></thead><tbody><tr><td>1</td><td>72.3</td><td>67.8</td><td>64.8</td></tr><tr><td>4.0</td><td>63.3</td><td>55.8</td><td>52.8</td></tr><tr><td>8.0</td><td>48.8</td><td>49.7</td><td>46.7</td></tr><tr><td>10.0</td><td>57.3</td><td>47.8</td><td>44.8</td></tr><tr><td>16.0</td><td>54.2</td><td>43.7</td><td>40.7</td></tr><tr><td>20.0</td><td>52.8</td><td>41.8</td><td>38.8</td></tr><tr><td>25.0</td><td>51.3</td><td>39.8</td><td>36.8</td></tr><tr><td>31.25</td><td>49.9</td><td>37.9</td><td>34.9</td></tr><tr><td>62.5</td><td>45.4</td><td>31.9</td><td>28.9</td></tr><tr><td>100</td><td>42.3</td><td>27.8</td><td>24.8</td></tr><tr><td>200</td><td>37.8</td><td>21.8</td><td>18.8</td></tr><tr><td>250</td><td>36.3</td><td>19.8</td><td>16.8</td></tr><tr><td>300</td><td>35.1</td><td>18.3</td><td>15.3</td></tr><tr><td>500</td><td>31.8</td><td>13.8</td><td>10.8</td></tr></tbody></table>	Frequenz (Mhz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	DELAY ≤ns	1	20.0	-	74.3	570.0	4.0	23.0	3.8	65.3	552.0	8.0	24.5	5.3	60.8	546.7	10.0	25.0	5.9	59.3	545.4	16.0	25.0	7.5	56.2	543.0	20.0	25.0	8.4	54.8	542.1	25.0	24.3	9.4	53.3	541.2	31.25	23.6	10.5	51.9	540.4	62.5	21.5	15.0	47.4	538.6	100	20.1	19.1	44.3	537.6	200	18.0	27.6	39.8	536.5	250	17.3	31.1	38.3	536.3	300	16.8	34.3	37.1	536.1	500	15.2	45.3	33.8	535.6	Frequenz (Mhz)	PSNEXT ≥dB	ELFEXT ≤dB	PSELFEXT ≥dB	1	72.3	67.8	64.8	4.0	63.3	55.8	52.8	8.0	48.8	49.7	46.7	10.0	57.3	47.8	44.8	16.0	54.2	43.7	40.7	20.0	52.8	41.8	38.8	25.0	51.3	39.8	36.8	31.25	49.9	37.9	34.9	62.5	45.4	31.9	28.9	100	42.3	27.8	24.8	200	37.8	21.8	18.8	250	36.3	19.8	16.8	300	35.1	18.3	15.3	500	31.8	13.8	10.8
Frequenz (Mhz)	RL ≥dB		ATT ≤dB	NEXT ≥dB	DELAY ≤ns																																																																																																																																				
1	20.0		-	74.3	570.0																																																																																																																																				
4.0	23.0		3.8	65.3	552.0																																																																																																																																				
8.0	24.5		5.3	60.8	546.7																																																																																																																																				
10.0	25.0		5.9	59.3	545.4																																																																																																																																				
16.0	25.0		7.5	56.2	543.0																																																																																																																																				
20.0	25.0		8.4	54.8	542.1																																																																																																																																				
25.0	24.3		9.4	53.3	541.2																																																																																																																																				
31.25	23.6		10.5	51.9	540.4																																																																																																																																				
62.5	21.5		15.0	47.4	538.6																																																																																																																																				
100	20.1		19.1	44.3	537.6																																																																																																																																				
200	18.0		27.6	39.8	536.5																																																																																																																																				
250	17.3		31.1	38.3	536.3																																																																																																																																				
300	16.8		34.3	37.1	536.1																																																																																																																																				
500	15.2		45.3	33.8	535.6																																																																																																																																				
Frequenz (Mhz)	PSNEXT ≥dB		ELFEXT ≤dB	PSELFEXT ≥dB																																																																																																																																					
1	72.3		67.8	64.8																																																																																																																																					
4.0	63.3		55.8	52.8																																																																																																																																					
8.0	48.8		49.7	46.7																																																																																																																																					
10.0	57.3	47.8	44.8																																																																																																																																						
16.0	54.2	43.7	40.7																																																																																																																																						
20.0	52.8	41.8	38.8																																																																																																																																						
25.0	51.3	39.8	36.8																																																																																																																																						
31.25	49.9	37.9	34.9																																																																																																																																						
62.5	45.4	31.9	28.9																																																																																																																																						
100	42.3	27.8	24.8																																																																																																																																						
200	37.8	21.8	18.8																																																																																																																																						
250	36.3	19.8	16.8																																																																																																																																						
300	35.1	18.3	15.3																																																																																																																																						
500	31.8	13.8	10.8																																																																																																																																						
Schirmung	SFTP																																																																																																																																								
AWG	23																																																																																																																																								
Durchmesser Kabel	7,5 mm																																																																																																																																								
Länge	50m																																																																																																																																								
Bandbreite	500.0 MHz																																																																																																																																								
Biegeradius	8x Durchmesser Kabel																																																																																																																																								
Maximale Ziehkraft (Mpa)	≥ 10.0																																																																																																																																								
Material Außenmantel	LSZH																																																																																																																																								
Farbe Außenmantel	Blau																																																																																																																																								
Aderfarben	1 - Weiß/ Blau																																																																																																																																								
	2 - Weiß/ Orange																																																																																																																																								
	3 - Weiß/ Grün																																																																																																																																								
	4 - Weiß/ Braun																																																																																																																																								
Rip-cord	Integriert																																																																																																																																								
Verpackung	Abrollkarton																																																																																																																																								